

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BÂTI SOLIDE

4' Anchor Strap with D-Ring

CAK110

4' (1.2m)

The **Kosto anchor strap** is engineered for **exceptional versatility and reliability** across a wide range of safety applications. Measuring **4 feet (1.2 m)** in length, it features a **durable 1 3/4" (4.5 cm) polyester construction**, designed to withstand demanding conditions.

Its design includes **pass-through loop** and an integrated **D-ring**, making it a key component for anchoring in diverse environments such as construction sites, industrial settings, and rescue operations.


To create a secure anchor point, wrap the strap around a steel beam or other solid structure. Then attach a **CSA-compliant connector** to the D-ring. This setup provides a secure anchorage rated up to **310 lbs / 141kg**.

Certification

Meets and Exceeds

⇒ **CSA Z259.15-12**

⇒ **ANSI Z359.1-2007**

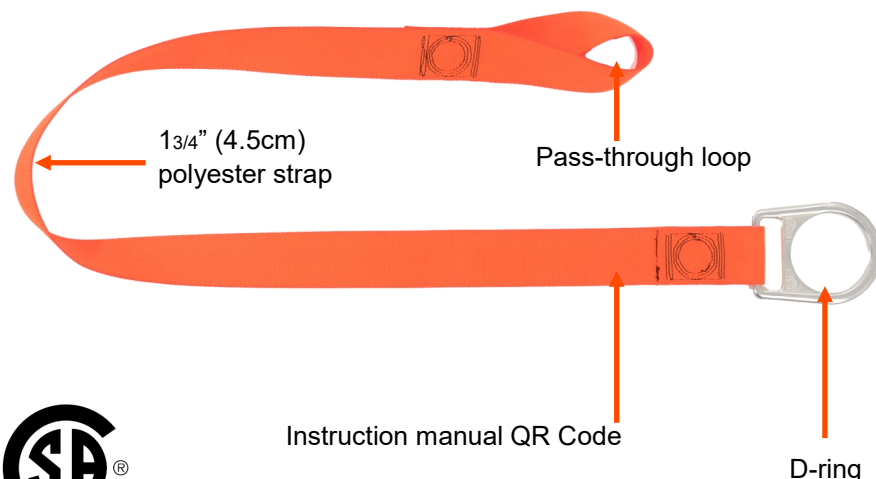

Material

Webbing	Polyester
D-Ring	Galvanized steel

Capacity:


59-141kg (130-310lbs) (weight range including equipment)

Technical Data

- Minimum Breaking Strength : 5,000lbs, 22kN

Installation and Use

- Select a suitable anchor point:** The structure can withstand a minimum force of 22kN, 5000lbs such as a steel beam, pipe, or other approved anchorage point.
- Wrap the strap around the anchor point:** Loop the strap around the selected structure and pass the D-Ring through the **pass-through loop**.
- Attach the carabiner to the D-ring:** Connect your compatible connector to the **D-ring** on the strap.
- Check for stability:** Make sure the strap is tight, with no twists or slack.



SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BÂTI SOLIDE

Associate Products

Covers the ABC of fall protection: Anchor points, Body support (harnesses), Connecting devices (lanyards) - ensuring complete safety at height.

Harness
CHK111



Harness XPRO
CHK211



Connecting elements

Lanyards CLK



Self-Retracting Lifeline
CDK



RopeGrab
CCK330

Ropes
**CCK400/
CCK450**



Anchor
CAK



Tool Lanyard
CAK030



Carrying Bag
XKW030



D-ring Extension
CCK118



Carabiner
CSK106



Maintenance and Inspection

Maintenance

- Clean after each use to maintain safety and durability.
- Remove any dust, corrosive material or contaminants.
- If the fall protection system cannot be cleaned with clean water, use mild soap and water, then rinse and wipe dry.
- NEVER clean the fall protection system with corrosive materials.

Inspection

- Before EVERY use, inspect the fall protection system for defects.
- IMMEDIATELY remove the fall protection system from service if any defects or damage are found, or if it is exposed to fall arrest forces.
- At least every 12 months, a competent person other than the user shall inspect the harness.

Important

- Users of this equipment must read and follow all manufacturer instructions, labels, and warnings for each component of the complete system before use. If you do not understand any instructions, labels, or warnings related to the use or maintenance of this component, seek clarification before proceeding.
- This equipment is intended for use by trained personnel only. All users must be familiar with and adhere to applicable CSA, OSHA, and ANSI regulations.
- This product is part of a complete fall arrest system and must be used only with compatible equipment and connectors. Failure to use the proper connector may result in serious injury or death.
- Any system or component that has been subjected to a fall must be immediately removed from service and destroyed.
- A comprehensive fall protection plan must include provisions for the prompt rescue of a fallen worker.



CAK110

See Instructions