

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BĂTI SOLIDE

General Harness – 3 Rings, Class AP

CHK133

This **Kosto 5-point adjustable safety harness** is made from 100% polyester, offering superior resistance to chemicals and wear. Designed for optimal performance at height, it includes a **dorsal D-ring** and **two lateral D-rings** for secure and precise worker positioning. **Trauma suspension straps** are integrated, providing a complete, and ready-to-use fall protection system. Classified as **Class AP**, this harness combines enhanced comfort with reliable safety, making it an ideal choice for a wide range of professional applications.

Certification

- **CSA Z259.10-18, Class AP** certified
- Meets and exceeds:
 - ⇒ **ANSI Z359.11-2021, ANSI A10.32-23**
 - ⇒ **OSHA 1910, OSHA 1926 Subpart M**

Aluminum back D-ring

Dual SRL slot

X in PVC to prevent tangling
and slippage

Impact indicator

Labels protector cover
with Instruction manual
QR code

Integrated trauma straps

Two lateral D-rings for
worker positioning

Seat strap for more comfort



Fall arrest
Class A



Positioning
Class P



Material

Dorsal D-Ring	Aluminum
Side D-Ring	Zinc Coated Steel
Webbing	100% Polyester
Connect Buckles	Zinc Coated Steel
Adjusters	Zinc Coated Steel

Size: Universal

Capacity: 59-141kg (130-310lbs)

Technical Data

- Maximum arresting force: 8kN, 1800lbs
- Harness Stretch: 0.6m (2')
- Maximum Tensile Strength : 22kN, 5000lbs

5 adjustment points
⇒ 2 x legs,
⇒ 2 x body,
⇒ 1 x chest

Resettable
Lanyard keeper

Chest pass-through buckle
and adjuster

Webbing Adjuster

Easy donning leg
straps

Soft loop webbing
keepers

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BÂTI SOLIDE

Associate Products

Covers the ABC of fall protection: Anchor points, Body support (harnesses), Connecting devices (lanyards) - ensuring complete safety at height.

Harness
CHK228



Harness XPRO
CHK234



Connecting elements

Lanyards CLK



Self-Retracting Lifeline
CDK



Anchor
CAK



Tool Lanyard
CAK030



Carrying Bag
XKW030



D-ring Extension
CCK118



Maintenance and Inspection


Maintenance

- Clean after each use to maintain safety and durability.
- Remove any dust, corrosive material or contaminants.
- If the fall protection system cannot be cleaned with clean water, use mild soap and water, then rinse and wipe dry.
- NEVER clean the fall protection system with corrosive materials.
- Hang to dry in a cool dry place and store in a bag when completely dry

Inspection

- Before EVERY use, inspect the fall protection system for defects.
- IMMEDIATELY remove the fall protection system from service if any defects or damage are found, or if it is exposed to fall arrest forces.
- At least every 12 months, a competent person other than the user shall inspect the harness.

Sizing Chart

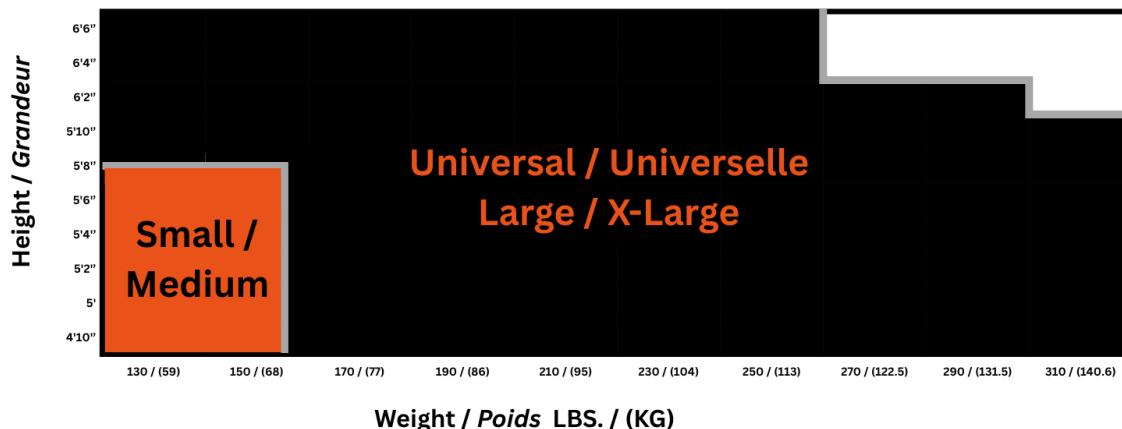

For all applications: work weight capacity range (including all clothing, tools, and equipment) is 130-310lbs.



CHK13

See Instructions

PROTECTION • RELIABILITY • VALUE

WWW.SPI.COM