

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BĀTI SOLIDE

Automatic Brake Winch 66' with Small Hook

CTK165

66' (20m)

The Kosto automatic brake winch is a robust and efficient solution for raising loads in confined or elevated work areas. Designed for use with the CTK012 tripod, this winch ensures smooth and secure lifting operations for industrial and construction applications. Built from high-strength steel and equipped with a 66-foot (20m) galvanized steel cable, it delivers exceptional durability and reliability under demanding conditions.

The winch is equipped with a self-locking device for raising and lowering. Weighing only 25lbs, 11kg, it is easy to transport and install, making it ideal for job sites where mobility and quick setup are essential. With a 410kg, 900lbs of lifting capacity, this winch combines strength, safety, and compliance. When using with a Kosto Tripod, the maximum lifting capacity is reduced to 280kg, 620lbs.

Certification

Meets and Exceeds

⇒ **CE EN1496 Class A**


Material	
Cable	3/16", 5mm Galvanized steel
Housing	Steel
Small snap hook	Zinc coated steel
Energy absorber	Polyester tear-away

Capacity:

- Maximum personal: 59-141kg (130-310lbs) (weight range including equipment)
- Maximum material: 410kg, 900lbs
- Tripod Capacity: 280kg, 620lbs

Technical Data

- Net weight: 11.4 kg (25 lb)

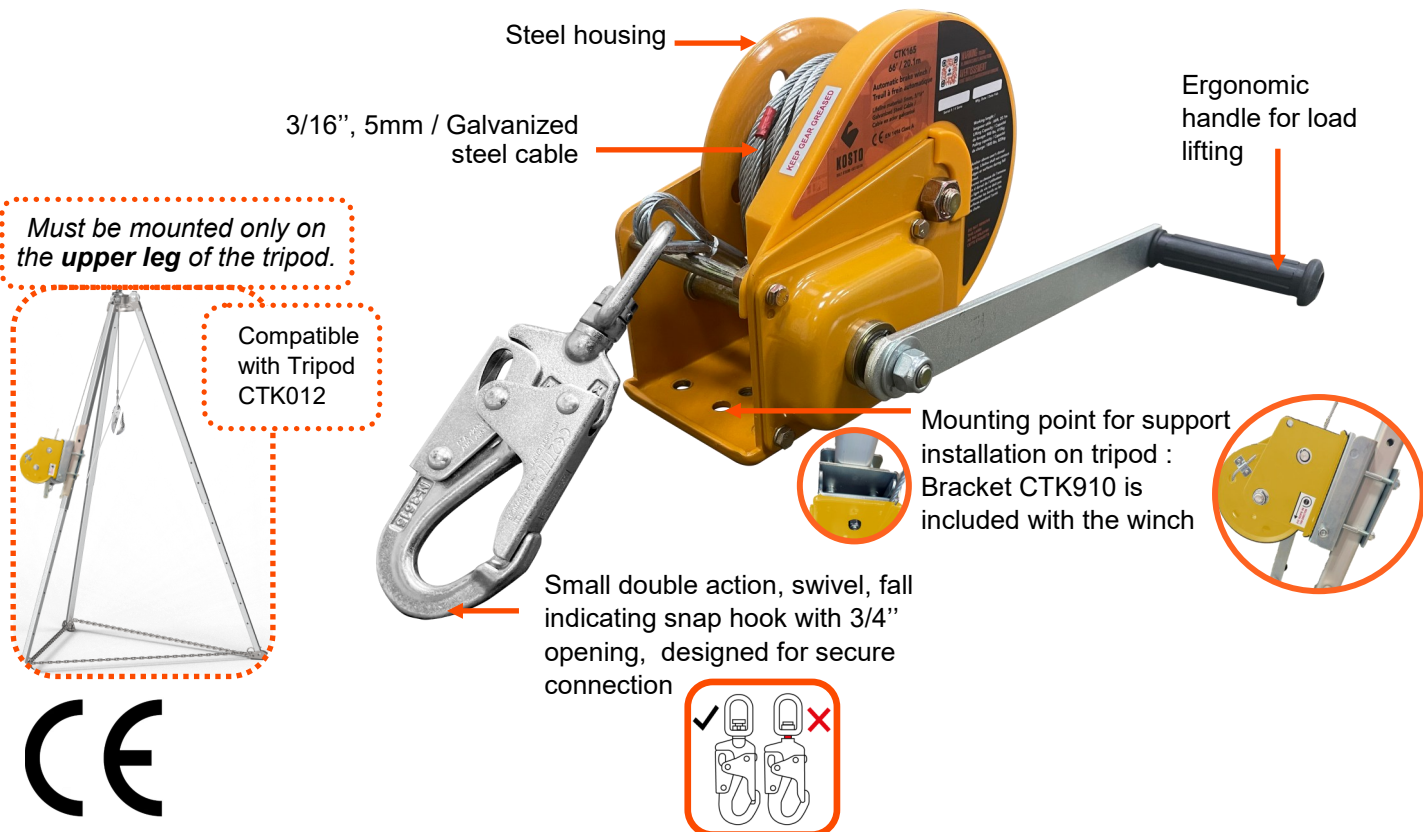

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BĀTI SOLIDE

Associate Products

Covers the ABCD of fall protection: Anchor points, Body support (harnesses), Connecting devices (lanyards) - Descent and Rescue ensuring complete safety at height.

Descent and Rescue

Tripod Kit CTK012



SRL-R
CDK350

Support
CTK910 for CDK350
and CTK165



Harness CHK131



Harness XPRO CHK230



Connecting elements

Lanyards CLK



Self-Retracting Lifeline CDK



Anchor
CAK

Maintenance and Inspection

Maintenance

- Clean after each use to maintain safety and durability.
- Remove any dust, corrosive material or contaminants.
- If the fall protection system cannot be cleaned with clean water, use mild soap and water, then rinse and wipe dry.
- NEVER clean the fall protection system with corrosive materials.
- Hang to dry in a cool dry place and store in a bag when completely dry

Inspection

- Before EVERY use, inspect the fall protection system for defects.
- IMMEDIATELY remove the fall protection system from service if any defects or damage are found, or if it is exposed to fall arrest forces.
- At least every 12 months, a competent person other than the user shall inspect the lanyard.

Important

- Always follow the manufacturer's instructions provided.
- Carefully read and fully understand all instructions before using the product.
- Improper use of this equipment can result in serious injury or death.
- Avoid contact with sharp edges or abrasive surfaces that could cut or damage the lanyard or its components.
- Ensure all connections are secure, compatible, and safe.
- Use only with other CSA- or OH&S-compliant equipment as part of a complete fall protection system.
- Immediately remove from service if it has been involved in a fall.

Refer to instruction manual



CTK165
See Instructions