

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BĀTI SOLIDE

Tripod Mounting Bracket for CDK350 and CTK165

CTK910

The Kosto universal mounting bracket is designed to securely attach either a winch or an SRL-R to the CTK012 tripod, offering maximum flexibility for various applications. Its user-friendly design allows for quick and effortless installation, featuring a lock pin system that ensures a safe and stable connection.


The bracket can be positioned at different heights on the tripod, providing optimal adaptability for lifting or fall protection setups. Built for durability and ease of use, this support is an essential accessory for professionals seeking reliable and efficient solutions on the job site.

Material

Bracket	Zinc coated steel
Lockpin	Zinc coated steel

Technical Data

- Maximum working load : determined by the specifications device being mounted.
- **Net weight:** 2kg, 4.35lbs

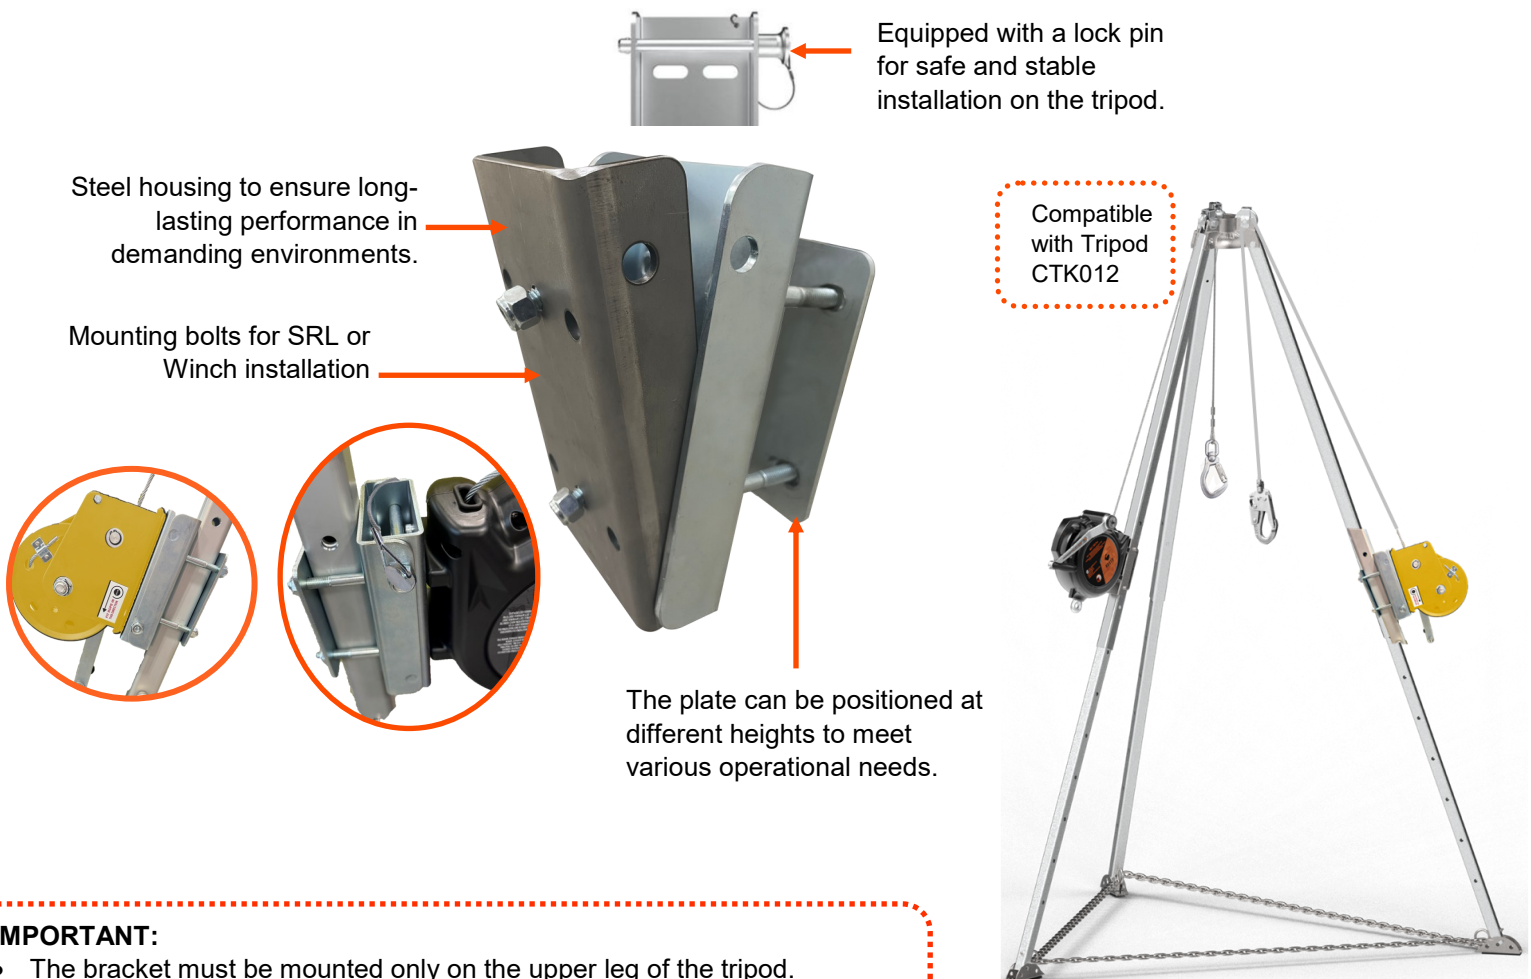

IMPORTANT:

- The bracket must be mounted only on the upper leg of the tripod.
- The original mounting pin and hardware must always be used.
- Do not replace or substitute these components with any alternatives.

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BĀTI SOLIDE

Associate Products

Covers the ABCD of fall protection: Anchor points, Body support (harnesses), Connecting devices (lanyards) - Descent and Rescue ensuring complete safety at height.

Descent and Rescue

Tripod Kit CTK012



SRL-R
CDK350



Winch
CTK165

Harness CHK131



Harness XPRO CHK230



Connecting elements

Lanyards CLK



Self-Retracting Lifeline CDK



Anchor CAK

Maintenance and Inspection

Maintenance

- Clean after each use to maintain safety and durability.
- Remove any dust, corrosive material or contaminants.
- If the fall protection system cannot be cleaned with clean water, use mild soap and water, then rinse and wipe dry.
- NEVER clean the fall protection system with corrosive materials.
- Hang to dry in a cool dry place and store in a bag when completely dry


Inspection

- Before EVERY use, inspect the fall protection system for defects.
- IMMEDIATELY remove the fall protection system from service if any defects or damage are found, or if it is exposed to fall arrest forces.
- At least every 12 months, a competent person other than the user shall inspect the lanyard.

Important

- Always follow the manufacturer's instructions provided.
- Carefully read and fully understand all instructions before using the product.
- Improper use of this equipment can result in serious injury or death.
- Avoid contact with sharp edges or abrasive surfaces that could cut or damage the lanyard or its components.
- Ensure all connections are secure, compatible, and safe.
- Use only with other CSA- or OH&S-compliant equipment as part of a complete fall protection system.
- Immediately remove from service if it has been involved in a fall.

Refer to instruction manual



See Instructions