

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BÂTI SOLIDE

2" Miner's Belt with Two D-Rings and One Strap

CBK102

1 Strap + 2 D-Rings

The Kosto **miner's belts** are expertly designed to provide optimal safety and support for professionals working in demanding environments. Made from durable polyester webbing, these belts are built to withstand the rigors of harsh conditions, making them essential tools for workers in the mining and construction industries.

This model features **two D-Rings**, allowing for quick and secure attachment to multiple anchor points and allows for work positioning so that workers can work hands free. The **single-strap** is ideal for securing lamps or respiratory devices, while ensuring that vital gear is always within reach.

With moisture-resistant properties and resistance to certain chemicals, these belts are engineered for long-lasting performance.

Certification

Certified


⇒ **CSA Z259.1-05, Type 2**

Meets and Exceeds

⇒ **ANSI Z359.1-07, ANSI A10.32-23,**

⇒ **OSHA 1910, OSHA 1926 Subpart M.**

Not to be used for Fall Arrest

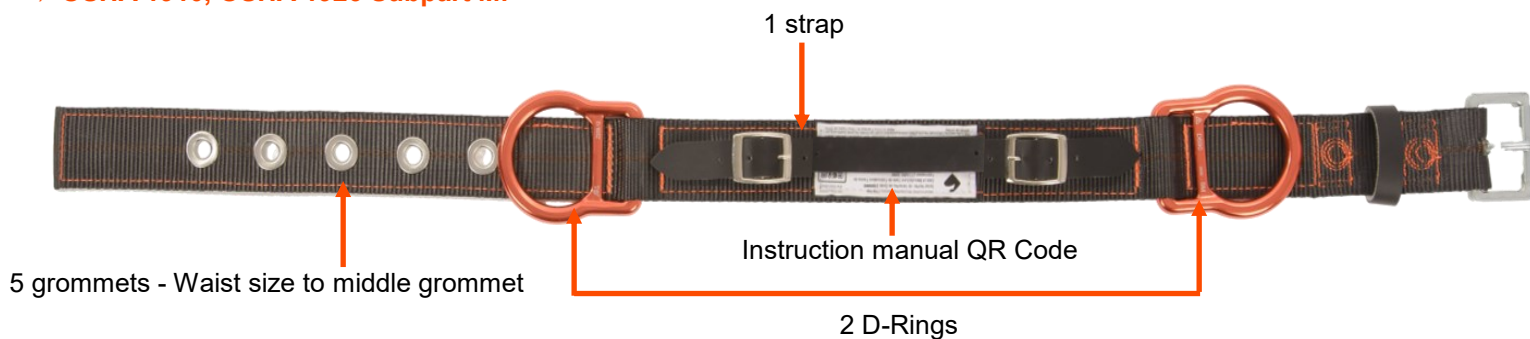

Miner's belt with 2 straps **CBK200** available

Miner's belt with 1 strap **CBK101** available

Miner's belt with polyurethane coating
CBK111 available

PROTECTION • RELIABILITY • VALUE

WWW.SPI.COM

Upd: 08-25

SPECIFICATION SHEET

Fall protection



KOSTO
BUILT STRONG • BÂTI SOLIDE


Associate Products

Covers the ABC of fall protection: Anchor points, Body support (harnesses), Connecting devices (lanyards) - ensuring complete safety at height.

Harness
CHK111



Harness XPRO
CHK230



Connecting elements

Lanyards CLK



Self-Retracting Lifeline
CDK



Anchor
CAK



D-ring Extension
CCK118



Tool Lanyard
CAK030



Carrying Bag
XKW030



Maintenance and Inspection


Maintenance

- Clean after each use to maintain safety and durability.
- Remove any dust, corrosive material or contaminants.
- If the fall protection system cannot be cleaned with clean water, use mild soap and water, then rinse and wipe dry.
- NEVER clean the fall protection system with corrosive materials.

Inspection

- Before EVERY use, inspect the fall protection system for defects.
- IMMEDIATELY remove the fall protection system from service if any defects or damage are found, or if it is exposed to fall arrest forces.
- At least every 12 months, a competent person other than the user shall inspect the harness.



How to Choose the Correct Size for Your Kosto Miner's Belt

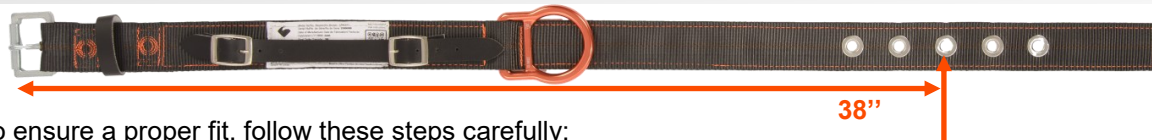

To ensure a proper fit, follow these steps carefully:

WARNING - Do not use your usual pants size. Pants sizes can vary and do not accurately reflect your waist measurement for safety equipment.

1. **Use a measuring tape to measure your actual waist circumference.** Wrap the tape measure around your waist where the belt will sit, over your work clothes.
2. **Select the belt size that matches your waist measurement.** For example, if your waist measures 38 inches, choose a size 38 belt.
3. **Verify the belt size by measuring from the buckle to the third hole.** This distance should match your waist measurement. In the example above, the third hole should be at 38 inches.



CBK102

See Instructions

By following this procedure, you'll ensure a secure and comfortable fit for optimal safety and performance.

PROTECTION • RELIABILITY • VALUE

WWW.SPI.COM